

# C161

## Soft Serve Freezer - Two Flavour 'Twist', Gravity



ITEM No. \_\_\_\_\_

### Model options:

- C161/1A Soft Serve Freezer
- C161/1A+C204 Soft Serve Freezer with optional cart

### Standard equipment:

- 1x Starter kit sanitiser sachets
- 1x White cleaning bucket
- 1x Tube Taylor food safe lubricant
- 1x Taylor cleaning brushes
- 1x Replacement tune up kit
- 12 Months parts & labour warranty

### Optional extras:

- 4" Legs
- Frozen yogurt spec mix feed tubes
- Extended service contract (call for details)

### Features:

Offer all the popular soft serve variations from 'Whippy style' low or non-fat ice creams to custards, yogurt, sorbet and vegan desserts in two different flavours or a 'twist' of the two.

- ◆ **Freezing Cylinder** - Two, 1.4 litre
- ◆ **Hourly Production\*\*** - 22.14 litres combined (approximately)
- ◆ **Mix Hopper** - Two, 7.6 litre. Separate hopper refrigeration (SHR) maintains mix below 5°C in Auto and Standby modes.
- ◆ **Indicator Lights** - The Mix Low and Mix Out light alerts the operator to add mix. An audible alarm may be enabled to sound when mix is low.
- ◆ **Electronic Controls** - Softech™ is our exclusive microprocessor based master control that regulates refrigeration by measuring product viscosity to maintain consistent quality.
- ◆ **Standby** - During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.
- ◆ **Air Filter** - Easily removable, cleanable air filter helps keep condenser clean for optimal refrigeration system performance.
- ◆ **Door Interlock System** - Protects the operator from injury as the beater will not operate without the dispensing door in place.



**Taylor UK**  
Catering Equipment Specialists

**Taylor UK** (a division of HTG Trading Ltd)  
106 Claydon Business Park, Gt. Blakenham,  
Ipswich, Suffolk, IP6 0NL, United Kingdom  
0800 838 896 - [sales@taylor-company.co.uk](mailto:sales@taylor-company.co.uk)  
[www.taylor-company.co.uk](http://www.taylor-company.co.uk)

Due to continual research and development, these specifications are subject to change without notification - May 2024


# C161



## Soft Serve Freezer - Two Flavour 'Twist', Gravity

ITEM No. \_\_\_\_\_

Section view: (Dimensions in mm shown in brackets)

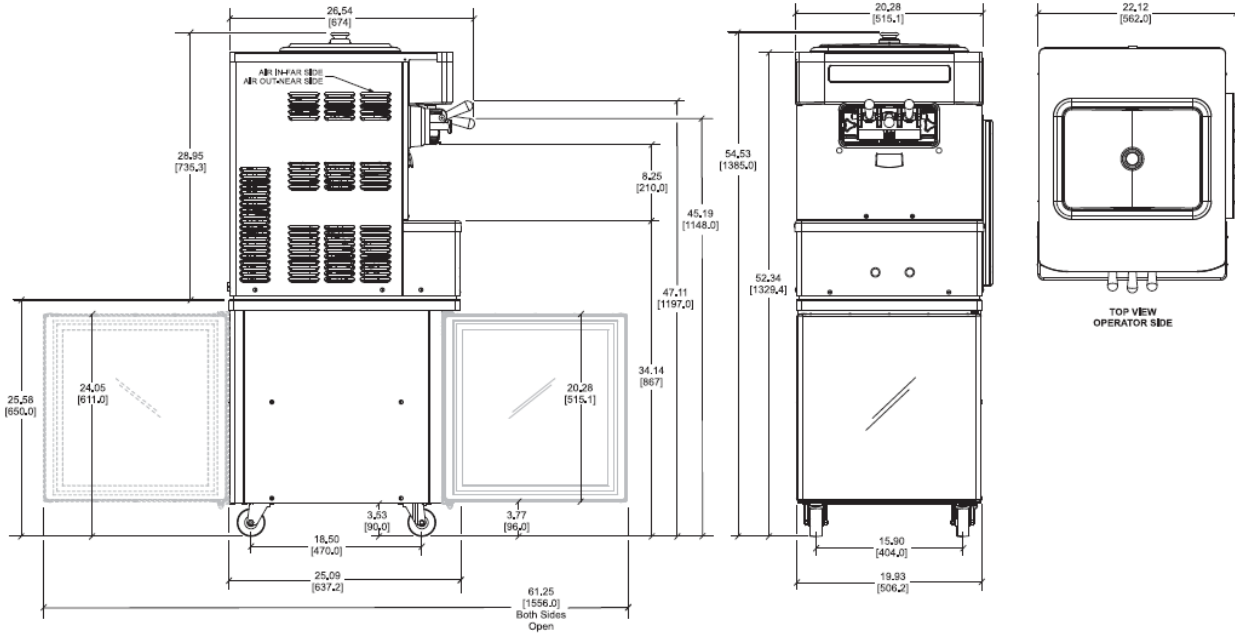

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO ( PLUS OR MINUS 1/16 INCH [1.5mm] ). DRAWING IS TO BE USED FOR REFERENCE ONLY - DO NOT USE FOR STORE CONSTRUCTION LAYOUT.

Shown with optional C204 cart.

TAYLOR C161	SINGLE PHASE
External dimensions (WxDxH) inc. Handle	516 x 674 x 736 mm
External dimensions (WxDxH) on Cart	516 x 674 x 1385 mm
Net weight / crated weight (freezer only)	138.3 Kg / 158.8 Kg
Wall clearance* (sides/back)	150 mm / 0 mm
Soft serve freezers are NOT designed for built-in installation	
Refrigeration system - Main	3,500 BTU/hr - R449A
Refrigeration system - Hopper	400 BTU/hr - R134A
Beater motor (No./Power)	2 - 0.5 HP
Noise Level	≤ 78 dB (A)
Cooling	Air ONLY
Approximate hourly production**	22.14 ltr
Voltage	230v / 50Hz / 1Ph
Total amp draw	10.0 amps
Circuit breaker/fuse	13 amp
Isolator socket	13 amp (1P+N+E)



\*Minimum air clearances **MUST** be met to assure adequate airflow for optimum performance of air cooled machines. Place the back of the unit against a wall to prevent recirculation of warm air. Failure to allow adequate airflow will invalidate any warranty claim.

\*\*Hourly production figures are approximate and based on optimum operating conditions. Product type, ambient air temperature and air flow will effect the production capacity.

•A dedicated power supply which can be completely disconnected is required for safe operation. Taylor equipment is not designed to be 'hard wired' and should never be operated on any form of extension lead.

**Please consult a qualified electrician for correct installation advice.**

Data for air cooled units.



**Taylor UK** (a division of HTG Trading Ltd)  
 106 Claydon Business Park, Gt. Blakenham,  
 Ipswich, Suffolk, IP6 0NL, United Kingdom  
 0800 838 896 - sales@taylor-company.co.uk  
 www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification - May 2024