Soft Serve Freezer - Single Flavour, Gravity

C152

TAYLOR®

Soft Serve Freezer - Single Flavour, Gravity





Taylor C152 with optional C208 cart



Model options:

□C152/1A Soft Serve Freezer

□C152/1A+C208 Soft Serve Freezer with optional cart

Standard equipment:

- 1x Starter kit sanitiser sachets
- 1x White cleaning bucket
- 1x Tube Taylor food safe lubricant
- 1x Taylor cleaning brushes
- 1x Replacement tune up kit
- 12 Months parts & labour warranty

Optional extras:

- □4" Legs
- □Frozen yogurt spec mix feed tube
- Extended service contract (call for details)

Features:

Offer all the popular soft serve variations from 'Whippy style' low or non-fat ice creams to custards, yogurt, sorbet and vegan desserts.

- ◆Freezing Cylinder One, 1.4 litre
- ◆Hourly Production** 12.24 litres (approximately)
- •Mix Hopper One, 7.6 litre. Separate hopper refrigeration (SHR) maintains mix below 5°C in Auto and Standby modes.
- •Indicator Lights The Mix Low and Mix Out light alerts the operator to add mix. An audible alarm may be enabled to sound when mix is low.
- ◆Electronic Controls Softech™ is our exclusive microprocessor based master control that regulates refrigeration by measuring product viscosity to maintain consistent quality.
- •Standby During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.
- Door Interlock System Protects the operator from injury as the beater will not operate without the dispensing door in place.





Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 ONL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk


C152



ITEM No.

Soft Serve Freezer - Single flavour, gravity

Section view: (Dimensions shown in brackets in mm)

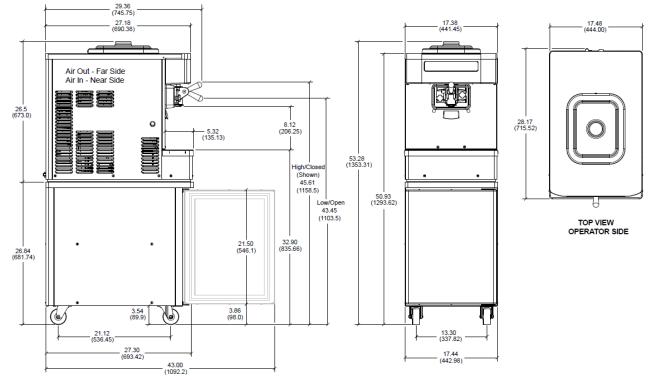

FIGURES IN BRACKETS INDICATE MILLIMETERS EQUIVALENT TO DECIMAL DIMENSIONS (PLUS OR MINUS 1/16 INCH [1.5MM]).

Shown with optional C208 cart.

TAYLOR C152	SINGLE PHASE
External dimensions (WxDxH) inc. Handle	442 x 746 x 673 mm
External dimensions (WxDxH) on Cart	442 x 746 x 1354 mm
Net weight / crated weight (freezer only)	94 Kg / 108 Kg
Wall clearance* (sides/back)	150 mm / 0 mm
Soft serve freezers are NOT designed for built-in installation	
Refrigeration system - Main	2,600 BTU/hr - R449A
Refrigeration system - Hopper	400 BTU/hr - R134A
Beater motor (No./Power)	1 - 0.5 HP
Noise Level	≤ 78 dB (A)
Cooling	Air ONLY
Approximate hourly production**	12.24 ltr
Voltage	230v / 50Hz / 1Ph
Total amp draw	7.8 amps
Circuit breaker/fuse	13 amp
Isolator socket	13 amp (1P+N+E)

^{*}Minimum air clearances **MUST** be met to assure adequate airflow for optimum performance of air cooled machines. Place the back of the unit against a wall to prevent recirculation of warm air. Failure to allow adequate airflow will invalidate any warranty claim.

**Hourly production figures are approximate and based on optimum operating conditions. Product type, ambient air temperature and air



Data for air cooled units



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 ONL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification - May 2024

^{**}Hourly production figures are approximate and based on optimum operating conditions. Product type, ambient air temperature and air flow will effect the production capacity.

[•]A dedicated power supply which can be completely disconnected is required for safe operation. Taylor equipment is not designed to be 'hard wired' and should never be operated on any form of extension lead.